


# Caplight ILC4B-LED



## ATEX M1

BASEEFA 06ATEX0335

Lighting time  
over 20 hours

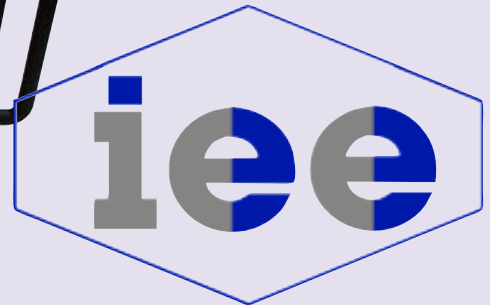

Only 700g  
weight

Very small  
dimensions



### TECNICAL DATA

Rated voltage .....	4,5 V
Rated capacity .....	4 Ah
Lighting time in standard mode .....	≥ 20 hours
Lighting time in full mode .....	≥ 10 hours
Explosion protection type .....	Ex ia I
Maximum illumination 1m from the lamp:	
After 10 hours in full mode .....	≥ 2.730 lux
After 20 hours in standard mode .....	≥ 1.745 lux
LED:	
Rated voltage .....	3,6 V
Main light current .....	0,26 A
Sub-light current .....	0,11 A
Battery life .....	≥ 2 years
Charging time .....	≤ 10 hours
Charging voltage .....	6-8 V
Ingress protection .....	IP54
Weight .....	≤ 700 gr.
Exterior dimensions .....	105 x 31 x 120 mm.

LED Lightsource  
Ni/MH Battery



[www.iee-caplight.com](http://www.iee-caplight.com)

INGENIERIA ELECTRICA ELECTRONICA, S.A.  
Polígono Industrial Vega de Baiña, 22  
E-33682 BAIÑA-Mieres (Asturias) - Spain  
Telf. + 34 985 446971 Fax +34 985 446972  
mail@ieespain.com  
www.ieespain.com

Agent for UK & Ireland:

**Engineered Safety Ltd.**  
Highfield Road, Mears Ashby,  
Northampton NN6 0EA - UK  
Telf. +44(0)1604 813649  
Fax +44(0)1604 810551

Agent for Germany:

**GOTHE&CO.**  
Kruppstr. 196  
D-45472 Mülheim an der Ruhr - Germany  
Telf. (0208)49509-0 Fax (0208)49509-27  
info@gothe.de www.gothe.de